



ALL-IN-ONE SOLAR STREET LIGHT



iSSL +

MADE IN FRANCE




l'intelligence
solaire solar
intelligence

iSSL+



WARRANTY
6 YEARS

MADE IN FRANCE



FUNCTION
ANTI BLACKOUT



COMMUNICATION &
REMOTE SUPERVISION




PLUG & PLAY



UNIQUE RESISTANCE
TO EXTREME CLIMATES

The iSSL+ is a reliable and robust all-in-one solar lighting solution particularly suitable for pedestrian paths, bike lanes, and parking areas. This innovative product offers very simple and quick installation (implemented in less than 10 minutes) with unparalleled performance and connected services.

The product is controlled through a monitoring service developed internally, the SunnAPP, and offers an optional motion detection feature.

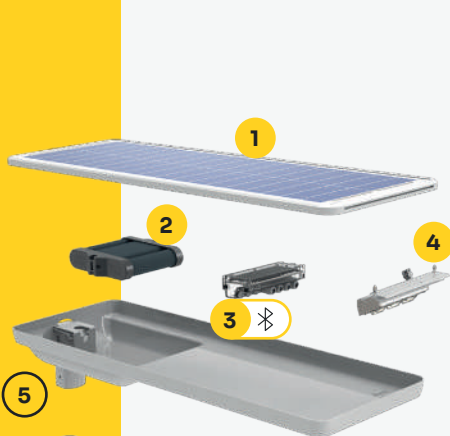

1

HORIZONTAL SOLAR PANELS

*Dedicated to tropical and temperate zones
Self-cleaning coating
No dust accumulation*

2

HIGH-PERFORMANCE NiMH BATTERY

*Resistant to extreme conditions
Long lifespan (average of 12 years)*

3

SUNNACORE

*Electronic board with Bluetooth connection
Intelligent energy management system to maximise
battery life and optimise lighting all year round*

4

HIGH-EFFICIENCY LED MODULE

*Tiltable from 0° to 30°
Up to 175 lm/W*

5


ANTI-VANDALISM

Anti-theft screws (optional)

■ MOTION DETECTOR

(optional)

- ☑ Lighting or increase in intensity upon detecting movement around the street light
- ☑ Preserves battery life
- ☑ Optimal energy consumption
- ☑ No light pollution
- ☑ Enhanced security

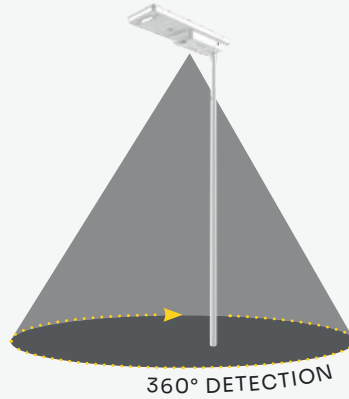

■ DATA SUPERVISION

☑ LOCAL SUNNAPP

(included)



Install your street lights and interact with your products via long-range Bluetooth.



Installation and commissioning support



Tracking and performance history




Registration and management of the park



Management of lighting profiles

☑ REMOTE SUNNA CLOUD

(optional)




Monitor your street lights in real-time and perform preventive or curative maintenance on your products.

■ SMART ENERGY MANAGEMENT



Integrated into the iSSL range, the **SunnaCore** includes an advanced **autonomy management** feature that ensures enough energy in the battery to provide **optimal service 365 nights a year**, even in periods of low solar irradiation.


■ CUSTOMIZED LIGHTING PROFILES



Our lighting profiles are optimized based on daily sunlight.


Based on previous days' weather data and the available battery capacity, our system automatically regulates light intensity to prevent outages and optimize lighting availability.

■ COLOR TEMPERATURES




■ LIGHT DISTRIBUTION



NARROW ROAD

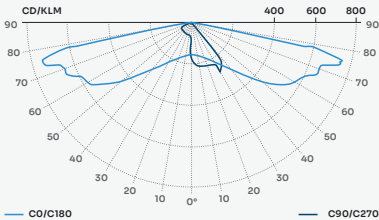

MEDIUM ROAD

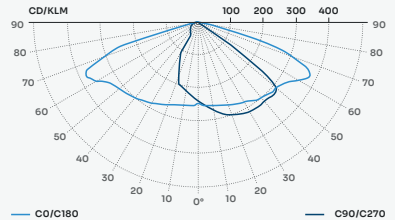

AREA & WIDE ROAD

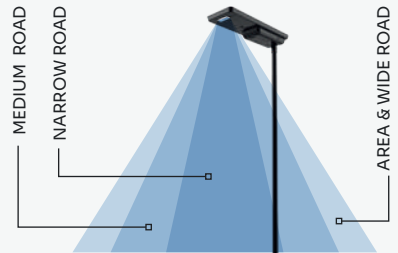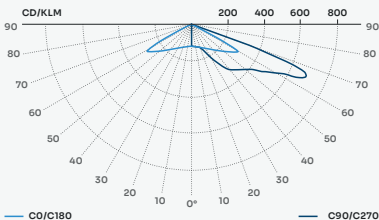

IP65	IK07(PV)	IK08	CE
------	----------	------	----


LIGHTING	LED Module	High-efficiency LEDs - Multichip technology (IP 67)
	Luminous Flux	1,800 to 3,600* lumens
	Power consumption	10 W to 20* W
	Luminous efficiency <i>(after optical losses)</i>	Up to 175 lm/W (4000 K / 5700 K)
	Color temperature	2700 K, 3000 K, 4000 K & 5700 K
	Lifetime	50,000 hours certified by IESNA LM-90 B-50
	Certificates	EN 13032-1; EN 13032-2; EN 13201; EN 60598-1; EN 62471
SOLAR PANELS	Technology	Photovoltaic module (Monocrystalline silicon)
	Power	50 Wc
	Specifications electrical per panel	VOC : 23,4 V / VMPP : 18,54 V / ISC : 2,85 A / IMPP : 2,7 A / 36 cells
	Panel dimensions	1000 x 350 mm (39.37 x 13.77 in)
	Lifetime	> 25 years at 80% of initial power
	Tilt	Horizontal (0°)
	Structure	Frameless
Certificates	IEC 61215; IEC 61730 I and II	
BATTERY	Battery technology	NiMH Battery (High temperature resistant, maintenance-free)
	Voltage	12V
	Capacity	120 Wh
	Operating temperature	-40°C to +70°C (-40°F to 158°F)
	Lifetime	12 years
	Certificates	EN 62133
ELECTRONICS	Technology	SunnaCore®
	Communication	Bluetooth
	Input voltage	12V
	Open circuit voltage	22,5V
	Max charge and discharge current	5A
	Wiring	Marine quality used for all applications
	Electrical protection	Electronic fuse
	Lifetime	12 years
	Water resistance	IP65 with waterproof connectors
	Certificates	CE; EN61000; EN61547; EN55015; EN62493; EN 62479 EN300328; EN 301489-1
GENERAL	Materials	Body ABS PMMA (100% recycled) and aluminum
	SCx	0,16 m ²
	Mounting	Top mount Ø60 mm
	Weight <i>(excluding pole)</i>	13 kg
	Options	Motion detector (detection radius: 3 to 5m depending on installation height) Anti-theft screws / Local or remote supervision

* Available with motion detection

■ PRODUCT CODIFICATION

CODE	COLOR T°	MOTION DETECTOR	LIGHTING PROFILE	COLOR (RAL)	OPTICS	OPTION
SD410	2	2700K	0 No	0A 100% (3h) / 40% / 100% (1h)	0 White (RAL 9010)	0 Area & Wide Road
	3	3000K	1 Yes	0B 60% (dusk - dawn)	1 Grey brown (RAL 8019)	1 Medium Road
	4	4000K		0C 100% (3h) / 20% + detection 100% / 100% (1h)	2 Black (RAL 9005)	2 Narrow Road
	0	5700K		0E 100% (2h) / 30% / 100% (1h)		
				0G 100% (2h) / 20% + detection 100% / 100% (1h)		
				0L 20% + detection 100%		
				0M 100% (5h) / 40% / 100% (1h)		
				0N 100% (6h) / 0%		
				0Q 50% (3h) / 15% / 50% (1h)		
				0R [50% (3h) / 12% / 50% (1h)] + detection 100%		
				0T 50% (4h) / 0% / 50% (1h)		
				AC 20% + detection 100% (dusk - 23h) / 0% / 20% + detection 100% (5h - dawn)		
				AH 0% + detection 100%		
				AM 100% (dusk - 8:30PM) / 0% / 50% (5AM - dawn - 30min) / 100% (dawn - 30min - dawn)		
				AT 100% (4h) / 0%		
				AU 100% (dusk - 00:00) / 0% / 100% (5AM - dawn)		
				BB 100% (dusk - 11:30PM) / 0% / 100% (5:30AM - dawn)		
				BD 100% (dusk - 10PM) / 0% / 100% (6:30AM - dawn)		
				BG 100% (dusk - dusk+2h) / 50% (dusk+2h - 11:30PM) / 0% (11:30PM - 5:30AM) / 50% (5:30AM - dawn - 1h) / 100% (dawn - 1h - dawn)		
				BJ 50% (2h30) + detection 100% / 0% / 50% (2h30) + detection 100%		
			BK 100% (2h) / 30% (3h) / 0% / 30% (1h) / 100% (1h)			
			BS 100% (3h) / 0% / 100% (2h)			

■ DIMENSIONS

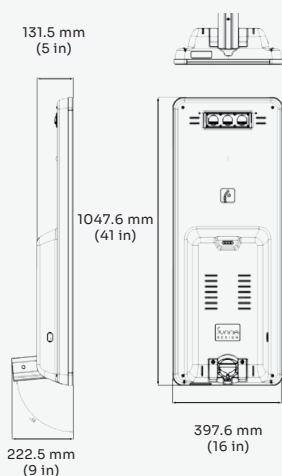

■ COLORS



RAL 9010
White



RAL 8019
Grey brown



RAL 9005
Black

PARC & RECREATION



APPLICATIONS

RURAL & REMOTE SITE



RETROFIT



2023



17 rue du Commandant Charcot
33290 Blanquefort - FRANCE



contact@sunna-design.com



sunna-design.com



SOLAR INTELLIGENCE