



ALL-IN-ONE SOLAR STREET LIGHT

iSSL Maxi 4

MADE IN FRANCE




l'intelligence
solaire solar
intelligence

iSSL Maxi 4



WARRANTY
6 YEARS

MADE IN FRANCE



**FUNCTION
ANTI BLACKOUT**



**COMMUNICATION &
REMOTE SUPERVISION**




PLUG & PLAY



**UNIQUE RESISTANCE
TO EXTREME CLIMATES**

iSSL Maxi 4 is an all-in-one, reliable and robust solar lighting solution that's quick and easy to install (set-up takes less than 10 minutes). This innovative device is particularly well-suited to lighting pedestrian walkways and cycle paths, for which it offers unrivalled performance and connected services.

The product is controlled by a smartphone monitoring application, SunnAPP, with a motion detection option.

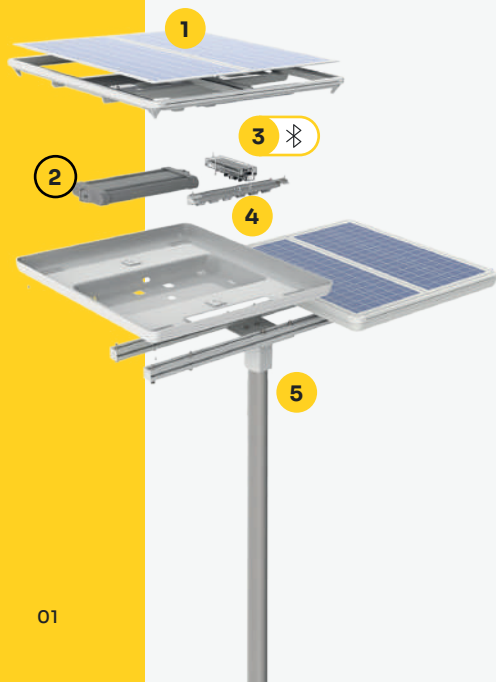

1

HORIZONTAL SOLAR PANELS

*Dedicated to tropical and temperate zones
Self-cleaning coating
No dust accumulation*

2

HIGH-PERFORMANCE NiMH BATTERY

*Resistant to extreme conditions
Long lifespan (average of 12 years)*

3

SUNNACORE

*Electronic board with Bluetooth connection
Intelligent energy management system to maximise
battery life and optimise lighting all year round*

4

HIGH-EFFICIENCY LED MODULE

*Tiltable from 0° to 30°
Up to 175 lm/W*

5



ANTI-VANDALISM

Anti-theft screws (optional)

MOTION DETECTOR

(optional)

- ☑ Lighting or increase in intensity upon detecting movement around the street light
- ☑ Preserves battery life
- ☑ Optimal energy consumption
- ☑ No light pollution
- ☑ Enhanced security

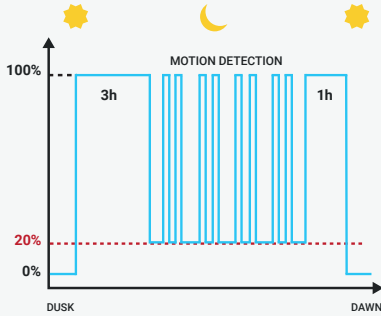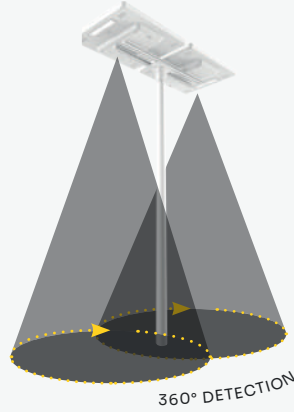

To ensure minimum visibility for all, whatever the time of day, while maximizing energy savings, Sunna Design offers an intelligent detection system.

Based on infrared motion sensors, it easily detects pedestrians, cyclists and slow-moving cars.

A solution that can achieve energy savings of up to 80% in low-traffic areas!





DATA SUPERVISION

☑ SUNNAPP LOCAL POINT-TO-POINT MONITORING

(included)



Install your street lights and interact with your products via long-range Bluetooth.


-  Installation and commissioning support
-  Tracking and performance history
-  Registration and management of the park
-  Management of lighting profiles

■ SMART ENERGY MANAGEMENT



Integrated into iSSL products, **SunnaCore** features advanced **autonomy management**, enabling the battery to provide **optimal service 365 nights a year**, even during periods of low solar irradiation.

■ CUSTOMIZED LIGHTING PROFILES



Our lighting profiles are optimized based on daily sunlight.


Based on previous days' weather data and the energy available in the battery, our system automatically regulates light intensity to prevent outages and optimize lighting availability.

■ COLOR TEMPERATURES




■ LIGHT DISTRIBUTION



NARROW ROAD

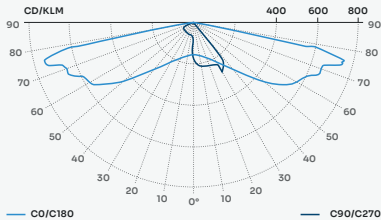

MEDIUM ROAD

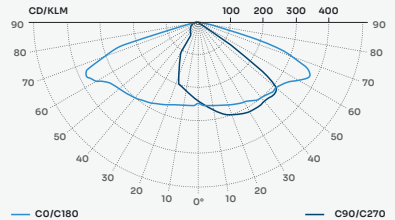

AREA & WIDE ROAD

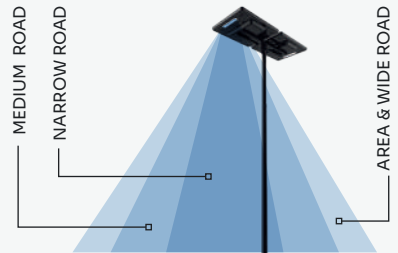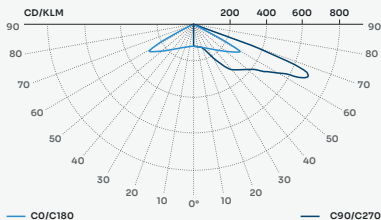

IP65	IK07(PV)	IK08	CE
------	----------	------	----

LIGHTING	LED Module	High-efficiency LEDs - Multichip technology (IP 67)
	Luminous Flux	7,000 to 14,000* lumens
	Power consumption	40 W to 80* W
	Luminous efficiency	Up to 175 lm/W (4000 K)
	Color temperature	2700 K, 3000 K, 4000 K
	Lifetime	50,000 hours
	Certificates	EN 60598-1; EN 62471
SOLAR PANELS	Technology	Photovoltaic module (Monocrystalline silicon)
	Power	160 Wc (4 x 40 Wc)
	Specifications electrical per panel	Isc = 2,19 A / Voc = 24,17 V / Imp = 2,01 A / Vmp = 19,9 V
	Panel dimensions	776 x 350 mm (30.55 x 13.77 in) (x4 solar panels)
	Lifetime	> 20 years at 80% of initial power
	Tilt	Horizontal (0°)
	Structure	Frameless
Certificates	IEC 61215; IEC 61730 I and II	
BATTERY	Battery technology	NiMH Battery (high resistance to extreme temperatures, maintenance-free)
	Voltage	24V
	Capacity	480 Wh (2 x 240 Wh)
	Operating temperature	-40°C to +70°C (-40°F to 158°F)
	Lifetime	12 years
Certificates	EN 62133	
ELECTRONICS	Technology	SunnaCore®
	Communication	Bluetooth
	Input voltage	24V
	Open circuit voltage	45V
	Max charge and discharge current	4.2A
	Electrical protection	Electronic fuse
	Water resistance	IP65 with waterproof connectors
Certificates	CE; EN61000	
GENERAL	Materials	Body ABS PMMA (70% recycled) and aluminum
	SCx	0,27 m ²
	Mounting	Top mount Ø60 mm
	Weight (excluding pole)	43 kg
	Options	Motion detector (detection radius: 3 to 5m depending on installation height) / Anti-theft screws / Local or remote supervision

* Available with motion detection

■ PRODUCT CODIFICATION

CODE	COLOR T ¹	MOTION DETECTOR	LIGHTING PROFILE	COLOR (RAL)	OPTICS	OPTION
SD426	2 2700K	0 Non	0A 100% (3h) / 40% / 100% (1h)	0 White (RAL 9010)	0 Area & Wide Road	0 Sans
	3 3000K	1 Out	0B 60% (dusk - dawn)	1 Grey brown (RAL 8019)	1 Medium Road	
	4 4000K		0C 100% (3h) / 20% + detection 100% / 100% (1h)	2 Noir (RAL 9005)	2 Narrow Road	
			0E 100% (2h) / 30% / 100% (1h)			
			0G 100% (2h) / 20% + detection 100% / 100% (1h)			
			0L 20% + detection 100%			
			0M 100% (5h) / 40% / 100% (1h)			
			0N 100% (5h) / 0%			
			0Q 50% (3h) / 15% / 50% (1h)			
			0R [50% (3h) / 12% / 50% (1h)] + detection 100%			
			0T 50% (4h) / 0% / 50% (1h)			
			AC 20% + detection 100% (crep - 23h) / 0% / 20% + detection 100% (5h - aube)			
			AH 0% + detection 100%			
			AM 100% (dusk - 8:30PM) / 0% / 50% (5AM - dawn - 30min) / 100% (dusk - 30min - dawn)			
			AT 100% (4h) / 0%			
			AU 100% (dusk - 00:00) / 0% / 100% (5AM - dawn)			
			BB 100% (dusk - 11:30PM) / 0% / 100% (5:30AM - dawn)			
			BD 100% (dusk - 10PM) / 0% / 100% (6:30AM - dawn)			
			BG 100% (dusk - dusk+2h) / 50% (dusk+2h - 11:30PM) / 0% (11:30PM - 5:30AM) / 50% (5:30Am - dawn-1h) / 100% (dusk-1h-dawn)			
			BJ 50% (2h30) + detection 100% / 0% / 50% (2h30) + detection 100%			
			BK 100% (2h) / 30% (3h) / 0% / 30% (1h) / 100% (1h)			
			BS 100% (3h) / 0% / 100% (2h)			

■ TWO POSSIBILITIES




MAXI 4 ROAD



MAXI 4 AREA

■ DIMENSIONS

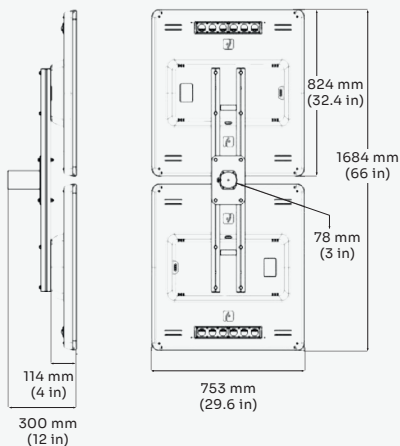

■ COLORS



RAL 9010
White



RAL 8019
Grey brown



RAL 9005
Black

CITY STADE



APPLICATIONS



ROUNDAABOUTS



ROADS



2024-02



17 rue du Commandant Charcot
33290 Blanquefort - FRANCE



contact@sunna-design.com



sunna-design.com



SOLAR INTELLIGENCE